




Superior Exteriors

MASONRY BRICK AND BLOCK

RENDER ONLY SYSTEM

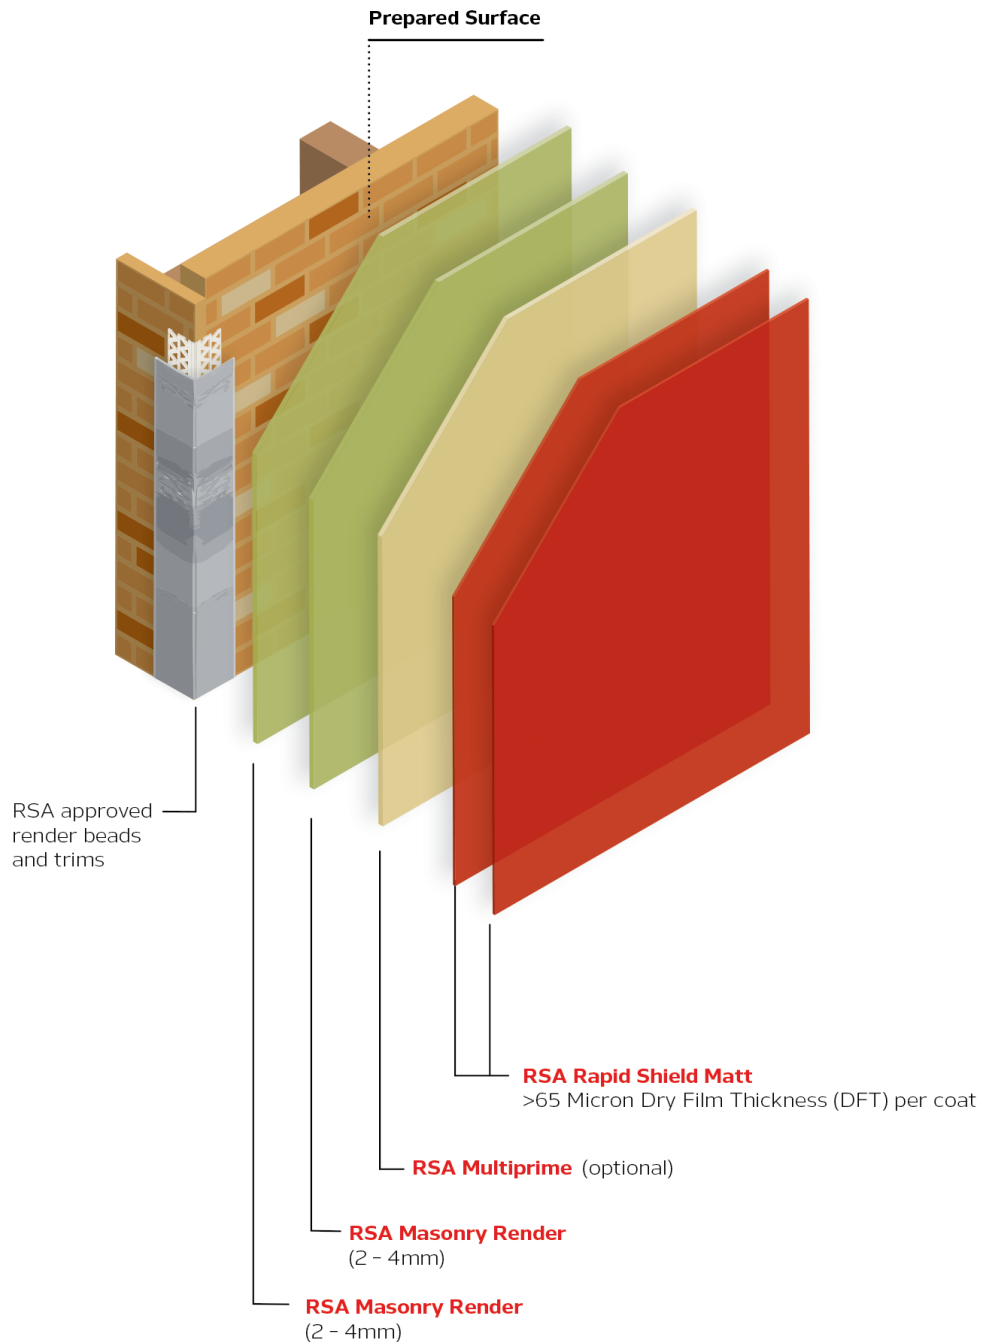

TECHNICAL AND AESTHETIC RATING

FLEXIBILITY (crack resistance)	AESTHETICS (render straightness)	WATER TIGHTNESS	CARE AND MAINTENANCE	EFFICIENCY
Excellent	Very Good - Excellent	Excellent	Excellent	Excellent



MASONRY BRICK AND BLOCK

RENDER ONLY SYSTEM

Always read the relevant Technical Data Sheets (TDS) and Application Guidelines prior to the use of any RSA product.

Where RSA Rapid Shield Matt is not used, the alternative protective coating must achieve a minimum of 130 microns DFT (2 coats).

INDEMNITY

Products must be applied in accordance with RSA Specifications and Technical Data Sheets by a skilled and experienced applicator.

RSA reserve the right to alter these specifications without further notice.

NOTE

DFT denotes Dry Film Thickness.

IMPORTANT

All substrate expansion, control and movement joints must be continued through the render system.

For any surfaces that may collect moisture, consideration to a waterproofing system or flashing system should be incorporated.

Due consideration must be given to weather forecasts and inherent climatic conditions to ensure appropriate curing (free from moisture ingress threats), of the product.

SUBSTRATE CHECK

Ensure the substrate has been installed in accordance with the manufacturers instructions and in accordance with correct building practices, paying particular attention to the positioning of control joints. The success and integrity of the coating system is dependent on the quality and installation of the substrate. Core filled masonry blocks must be fully cured for a minimum of 7 days prior to the application of a render system. RSA recommends a Wood Moisture Equivalent (WME) of less than 15% before commencing the render application process.

When applying RSA products over masonry blocks or clay bricks it is the applicators responsibility to check for variances and irregularities of density and porosity of the substrate before application. Masonry blocks and clay bricks can vary significantly and may affect adhesion of RSA products in some circumstances. It is the applicators responsibility to check with the substrate manufacturer for suitability of a rendered finish if variations of colour, density and porosity are present.

PREPARATION

Ensure all surfaces to be coated are sound, clean, dry and free from dirt, dust, loose material and / or contaminants. Brush the surface with a stiff broom prior to the application of any product. When rendering masonry blocks, it is highly recommended that the surface area is primed / sealed to ensure that the substrate achieves an even suction rate.

CORNER BEADS AND TRIMS

RSA Set & Prep must be used to install high quality, RSA Approved, UV resistant PVC corner beads and trims. For detailed installation information refer to the Set & Prep Application Guidelines.

STEP	PRODUCT	METHOD	BUILD	COVERAGE	RECOAT
RENDER COATS					
Step 1	RSA Set & Prep	Apply Set & Prep by trowel or broad knife to install RSA approved PVC corner beads and trims.		Each 20kg bag will cover approx. 25LM of PVC beads	Set & Prep may be overcoated once firm to touch
Step 2	RSA Masonry Render	Steel Trowel Float Finish	2 - 4mm	2m ² per 20kg (4mm)	
Step 3	RSA Masonry Render	Steel Trowel Float Finish	2 - 4mm	2m ² per 20kg (4mm)	24 hours
PRIMER COAT (optional)					
Step 4	RSA Multiprime	Brush or Roller		80 - 120m ²	24 hours
PROTECTIVE COATING					
Step 5	RSA Rapid Shield (1st Coat)	Brush and Roller 12 - 20mm Nap Roller	Min 65 microns DFT	70 - 80m ² / 15L	5 hours
	RSA Rapid Shield (2ndcoat)	Brush and Roller 12 - 20mm Nap Roller	Min 65 microns DFT	80 - 90m ² / 15L	

WARRANTY

Render Systems Australia (RSA) offers a 7 Year Product Warranty provided:

1. All substrates are installed in accordance with manufacturers specifications, Australian Standards and Good Trade Practices.
2. All products and processes as detailed above are applied by an RSA preferred contractor and in accordance with RSA Technical Data Sheets, Specifications, Application Guidelines and Good Trade Practices.
3. Guidelines Only – always refer to RSA Technical Data Sheets and Application Guidelines.

RSA strongly recommend viewing a physical product sample prior to selection of finish and colour.



For more information call Head Office: **07 3412 8111** Toll Free: **1800 077 744**
www.renderssystemsaustralia.com.au